




## KDock-2

### USB-C Hub Multiport Adapter

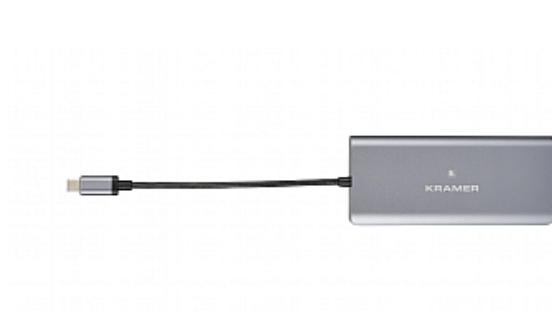

KDock-2 is a USB-C hub multiport adapter specially designed to support mobile devices and is an ideal accessory for MacBook, laptops equipped with USB Type-C, smartphones, and tablets. KDock-2 enables you to connect your USB-C device to an HDMI™ video output, 2 USB 3.0 ports, an Ethernet port, SD card port and USB-C port for data transmission and charging.

Note: Video output for smartphones is supported only for smartphones that support DisplayPort Alt mode through USB-C

#### TECHNICAL SPECIFICATIONS

|                                              |                                                                           |
|----------------------------------------------|---------------------------------------------------------------------------|
| Inputs                                       | 1 USB: On a USB Type-C male connector                                     |
| Outputs                                      | 1 HDMI On a female HDMI connector.:                                       |
| Ports                                        | 2 USB 3.0: On female USB type-A connectors                                |
|                                              | 1 Ethernet: On an RJ-45 connector                                         |
|                                              | SD: On an SD card port                                                    |
|                                              | 1 USB: On a female USB type-C connector for data and charging             |
| Video                                        | Max Resolution (HDMI output): 3840x2160P@30Hz                             |
|                                              | Max Data Rate: (HDMI output): 10.2Gbps (3.4Gbps per graphic channel)      |
|                                              | Content Protection (HDMI output): HDCP 1.4                                |
| Extended Ethernet                            | Max Data Rate 1000M (Gigabit)/100M/10M                                    |
|                                              | Includes Wake-on-LAN (WoL), single Mac address, PXE boot                  |
| General                                      | USB Data Transmission Speed (USB 3.0 & USB-C) up to 5.0Gbps               |
| Power                                        | Delivery 100W                                                             |
|                                              | USB Charging: BC1.2 (5V 1.5A)                                             |
|                                              | USB Limited Current when Connected to Power via female USB-C port: 1.9A   |
|                                              | USB Limited Current when Not Connected to Power via female USB-C port: 1A |
| Environmental Conditions                     | Operating Temperature: 0° to +70°C (32° to 158°F)                         |
|                                              | Storage Temperature: -10° to +55°C (14° to 131°F)                         |
|                                              | Humidity: 5% to 90%, RHL non-condensing                                   |
| Enclosure                                    | Type: Aluminum with built-in 16cm/6.3" flexible USB-C cable               |
| Regulatory Compliance (Standards Compliance) | Safety: CE                                                                |
|                                              | Environmental: RoHs, FCC                                                  |

Product Dimensions 11.65cm x 6.68cm x 1.60cm (4.59" x 2.63" x 0.63" ) W, D, H

Product Weight 0.1kg (0.2lbs) approx

Shipping Dimensions 15.60cm x 10.20cm x 3.50cm (6.14" x 4.02" x 1.38" ) W, D, H

Shipping Weight 0.1kg (0.3lbs) approx

